DAIWA DST-73LHB

取扱説明書（安全編）

ご使用の前に、この取扱説明書（安全編）と別冊の取扱説明書をお読みのうえ、正しくご使用ください。
お読みになった後は、大切に保管し、必要なときにお読みください。
この取扱説明書に書かれている内容は、お客様が購入された商品の仕様には含まれていない項目も記載されています。

安全上必ずお守りください

● 絵表示の説明

この表示は、してはいけない『禁止』の内容です。 具体的な禁止内容は、絵や文章で示しています。	この表示は、必ず実行していただく『強制』の内容です。 具体的な強制内容は、絵や文章で示しています。

⚠ 警告

禁止	制限重量を超えたカメラ（機器）を搭載しない。 重量を超えた場合、カメラの落下、転倒などで怪我の原因となります。
禁止	脚を閉じたままの状態や、開脚途中の状態で使用しない。 転倒し、怪我の原因となります。
禁止	塩害や腐食性ガスなどの発生する場所に放置しない。 取付部、脚部が劣化し、破損、落下などで怪我の原因となります。
禁止	カメラ（機器）を取り付けたまま持ち運びをしない。 カメラの落下などで、怪我の原因となります。
	カメラ（機器）の固定ネジや、固定機構はしっかりと締め付ける。 締め付けがゆるむと、転倒、落下などで怪我の原因となります。
メンテナンス	定期的に点検する。 金具やネジの腐食、プラスチックの劣化による落下などで怪我の原因となります。

⚠ 注意

	脚の先端部（石突）は、鋭角になっているため取扱いに注意する。 振り回したり、足などの上に落とさないようにしてください。 怪我、器物破損の原因となります。
	カメラ（機器）の取り付け時、三脚の設置時に足場の確認をする。 不安定な場所でカメラの脱着や操作は転倒、落下などで怪我の原因となります。
	脚の開閉、伸縮時に指をはさまないように注意する。 脚の間に指をいれたまま、開閉、伸縮をすると指をはさみ怪我の原因となります。
禁止	金属のエッジを手でこすらない。 強くこすると、怪我の原因となります。
禁止	ぶら下がらない、足場代わりにしない。 転倒して怪我の原因となります。
禁止	お手入れの際は、ベンジン、アルコール、シンナー等は、使用しない。 塗料や表示がはげたり、変質することがあります。
禁止	包装箱や包装袋などは、お子様の遊びに使わせない。 遊びに使ったりすると、怪我や窒息する場合があります。
	運搬の際は、脚をベルトなどで束ねると安全です。 引っかけによる転倒や、指をはさむ怪我の原因となります。
	修理や、定期点検は販売店に依頼する。 定期点検を怠ると、怪我、器物破損の原因となります。

Instruction Manual (Safety Part)

Please read this instruction manual (Safety Part) and operation instruction manual carefully.
Keep these instruction manuals and read these manuals as necessary.
This instruction manual may include contents not applied on your products.

SAFETY CAUTIONS

● Marks

This icon refers to information pertaining to prohibit contents. Please refer to instructions closely to avoid accidents.	This icon refers to information pertaining to 'must do' contents. Please refer to instructions closely to avoid accidents.

⚠ WARNING

Prohibition	Do not overload. This may cause tripod tipping over or a camera falling down.
Prohibition	Do not operate while tripod legs are not opened fully. This may cause tripod tipping over or camera falling down.
Prohibition	Do not leave the tripod where salt-air damages or corrosive gases surrounded. The tripod may be damaged due to degradations.
Prohibition	Do not move tripod with camera mounted on. This may cause a camera falling down.
	Make sure to tighten up screws and levers before use. It may cause tripod tipping over or a camera falling down.
Maintenance	Maintain the tripod periodically. It may cause injures due to degrading of metal fittings, screws and plastic materials.

⚠ NOTICE

	Pay attention for the spikes, the edge of tripod. They are very sharp. It may cause injures or other devices broken down.
	Install tripod with well balanced to the ground. It may cause tripod tipping over or a camera falling down.
	Pay attention not to pinch your fingers when extending / shortening the tripod legs. If your fingers between tripod legs during operation, it may cause injures.
Prohibition	Do not rub around the edge of metals. It may cause injures.
Prohibition	Do not hang or use as ladder. It may cause injures.
Prohibition	Do not use benzene, alcohols, thinners and these equivalents. The painting may be damaged.
Prohibition	Keep away the packages and plastic bags from children. It may cause serious injures.
	We recommend bundling the tripod legs during transporting. This may prevent unexpected fall down or pinching your fingers.
	Repairing and inspection should consult with your local dealer. It may cause unexpected accidents if periodic inspection is ignored.

PARTS LIST (DAIWA DST-73LHB)

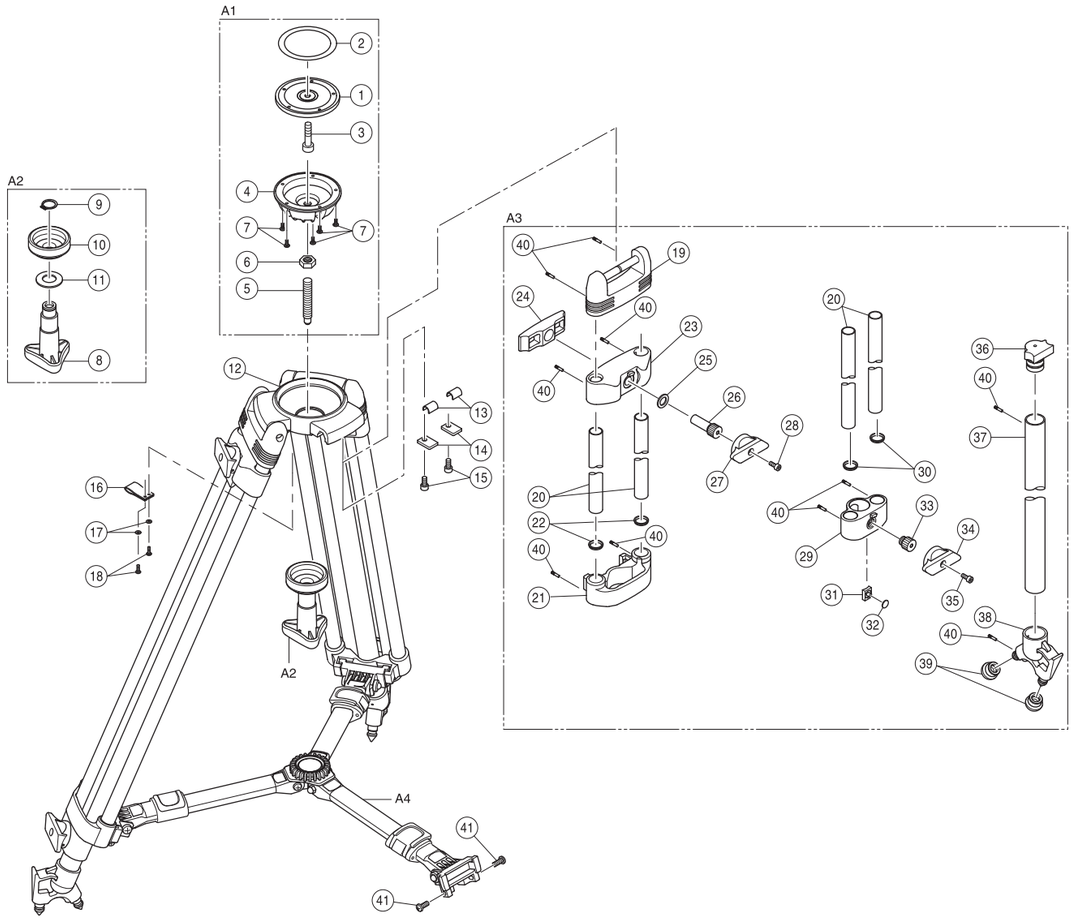

No.	部品番号	部品名	Name of parts	使用数
A1	2/40-303-2	517=75 ハーフボール u.	75Half Ball u.	1
1	3/1-P792-02-7	517=75 ボールベース	75Ball Base	1
2	3/1-P793-99-6	517= ベースカバー	Base Cover	1
3	3/9-N027-48-5	U3/8×20 キャップボルト	U3/8×20 Cap Bolt	1
4	3/1-M034-73-3	410Sh=75 ボール (カコウ)	75Ball (PROCESS)	1
5	3/1-E223-33-9	レベラーボルト	Leveler Bolt	1
6	3/9-M073-47-0	M10 ナイロンナット	M10 Nut	1
7	3/9-F041-40-0	+ バインド 3×8 BZN	Screw 3×8	5
A2	2/40-226-5	414=75 ボールロックノブ u.	75Ball Lock Knob u.	1
8	3/1-E274-53-7	レベラーノブ	Leveler Knob	1
9	3/9-F053-43-2	C ガタトメワジクヨウ 16	C ring 16	1
10	3/1-K814-02-2	409=75 ボールオサエ (ダイカスト)	Ball Lock	1
11	3/9-F142-99-0	サラバネ 16×31.5×1.8SUS	Washer 16×31.5×1.8SUS	1
12	3/4-M046-76-0	410Sh=75 キャクダイ (カコウ・トソウ)	75 Leg Body (PROCESS)	1
13	3/4-E018-98-5	キャクトウスペーサー	Leg Joint Spacer	6
14	3/4-E017-99-7	キャクトウトメイタ	Leg Joint Plate	6
15	3/9-F130-40-2	キャップスクリュー 5×10 BZN	Cap Screw 5×10 BZN	6
16	3/2-E076-99-7	75TP ストラップベルト	Strap belt	1
17	3/9-F180-36-1	ヒラザガネ 3×7×0.5 NI	φ7×φ3×0.5 Washer	2
18	3/9-F038-40-9	+ バインド 3×10 BZN	3×10 Screw	2
A3	2/40-221-4	414=W キャク u.	Leg u.	3
19	3/4-M188-52-2	414= キャクトウ	Leg Joint	3
20	3/4-M189-02-2	414=15×1×505P.	15×1×505 Pipe	12
21	3/4-M190-52-7	414= ウケダイ	Leg Grasp	3
22	3/4-M195-52-9	414= ウケダイクッション	Leg Grasp Cushion	6
23	3/4-M191-52-3	414=トリツケダイ	Leg Grasp	3
24	3/4-M192-52-0	414= キャクオサエイタ	Leg Stop Plate	3
25	3/9-H836-36-1	φ16×10×1.5 ヒラザガネ	φ16×10×1.5 Washer	3

No.	部品番号	部品名	Name of parts	使用数
26	3/4-H799-98-8	376Sh= キャクロックネジ	Leg Lock Screw	3
27	3/4-H800-52-8	415= キャクロックレバー	Leg Lock Lever	3
28	3/9-F124-40-2	キャップスクリュー 4×10 B	4×10 Screw	3
29	3/4-M193-52-6	414= チュウオウキャクダイ	Center Leg Lock Housing	3
30	3/4-M196-52-5	414= チュウオウキャクダイクッション	Center Leg Lock Housing Cushion	6
31	3/4-H809-52-5	376Sh= チュウオウキャクドメ	Pressing Tip	3
32	3/9-H810-33-8	φ9×4.5×0.8 ヒラザガネ	φ9×4.5×0.8 Washer	3
33	3/4-H812-36-4	376Sh= チュウオウキャクロックネジ	Leg Lock Screw	3
34	3/4-H800-52-8	415= キャクロックレバー	Leg Lock Lever	3
35	3/9-F124-40-2	キャップスクリュー 4×10 B	4×10 Screw	3
36	3/4-M194-52-2	414= チュウオウキャクガイド	Center Leg Guide	3
37	3/4-H817-02-1	376Sh=22×1×520P. チュウオウキャク	22×1×520 Pipe	3
38	3/4-H818-52-4	376Sh= イシヅキダイ	Leg Tip	3
39	3/4-H820-99-5	イシヅキゴム	Leg Tip Rubber	6
40	3/9-K598-49-0	2.5×12 ローレットピン	2.5×12 Pin	30
A4	2/40-108-0	230=ML06 Leg Brace Unit (Black)	Leg Brace Unit (Black)	1
41	3/9-G348-40-1	P タイト + ナベ 5×12 (BZN)	Pan Head Tapping Screw 5×12	6

・修理要請及び部品単品注文は、本ページのイラスト図にてご指示ねがいます。
・保証期間内の修理の場合は保証書をそえてご依頼ください。
・取説本文中の部品名（一般呼称）だけでは部品を特定出来ません。
適宜用紙に部品番号を記入又はイラストにマーキングのうえ、ファクス等にてご注文ください。
イラストでは個々部品でも、組立ブロックでの供給になるものがあります。
・なお、ご持参・配送・送金にかかる諸費用はお客さまご負担にてお願いいたします。

・Repairing requests and spare parts orders must be expressed with numbers in the diagram.
・Original warranty paper must be represented to receive the warranty.
・We are unable to determine a part without a number on this diagram. Contact your nearest distributor with the numbers in the diagram by fax, email or etc.
Some spare parts may be provided as a unit, not a part itself.
Please contact your nearest distributor for more details.
・The tripod owner has a responsibility to cover a round-trip freight charge for repairing.

スリック株式会社
本社/〒350-1231 埼玉県日高市鹿山853 Tel. 042-989-2141 Fax. 042-985-0210

SLIK CORPORATION
853 Kayama, Hidaka City, Saitama 350-1231 Japan Phone 81-42-989-2141, Fax. 81-42-985-0210 ©2012